


Slave Clock Movement

NU 90k

NU 90m

NU 90t

Minute Impulse Movement for
Indoor and Outdoor Clocks

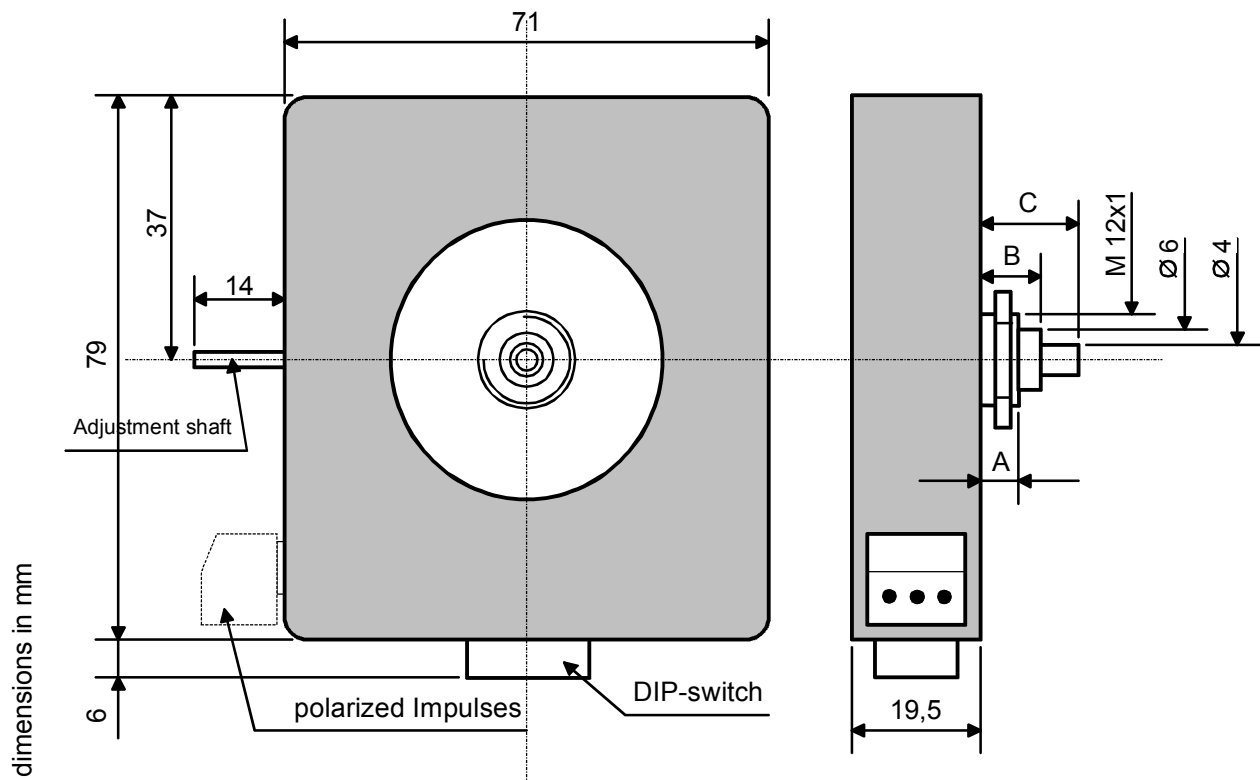

	NU 90 k	NU 90 m	NU 90 t
A	5.8	11.8	26.5
B	9.3	15.3	30.0
C	15.8	22.3	37.0

Art. No. NU 90 k	: W850 1000 0000, short shaft for dial thickness max. 3.5mm.
Art. No. NU 90 m	: W850 2000 0000, medium shaft for dial thickness max. 8mm.
Art. No. NU 90 t	: W850 3000 0000, long shaft for illuminated clocks.
Impulse Voltage	: 12, 24, 48 or 60 VDC, selectable by DIP-switch
Impulse Current	: 12 mA at 12 VDC, 6 mA at 24, 48 and 60 VDC
Dial Diameter	: Up to 80 cm
Adjustment	: Lateral shaft or button on back side
Operating Temperature	: -30 to +70 °C
Weight	: 180 g